


Liquid Nitrogen Comparator

PERFECT DEVICE FOR EASY TEMPERATURE CALIBRATIONS
AT -196 C

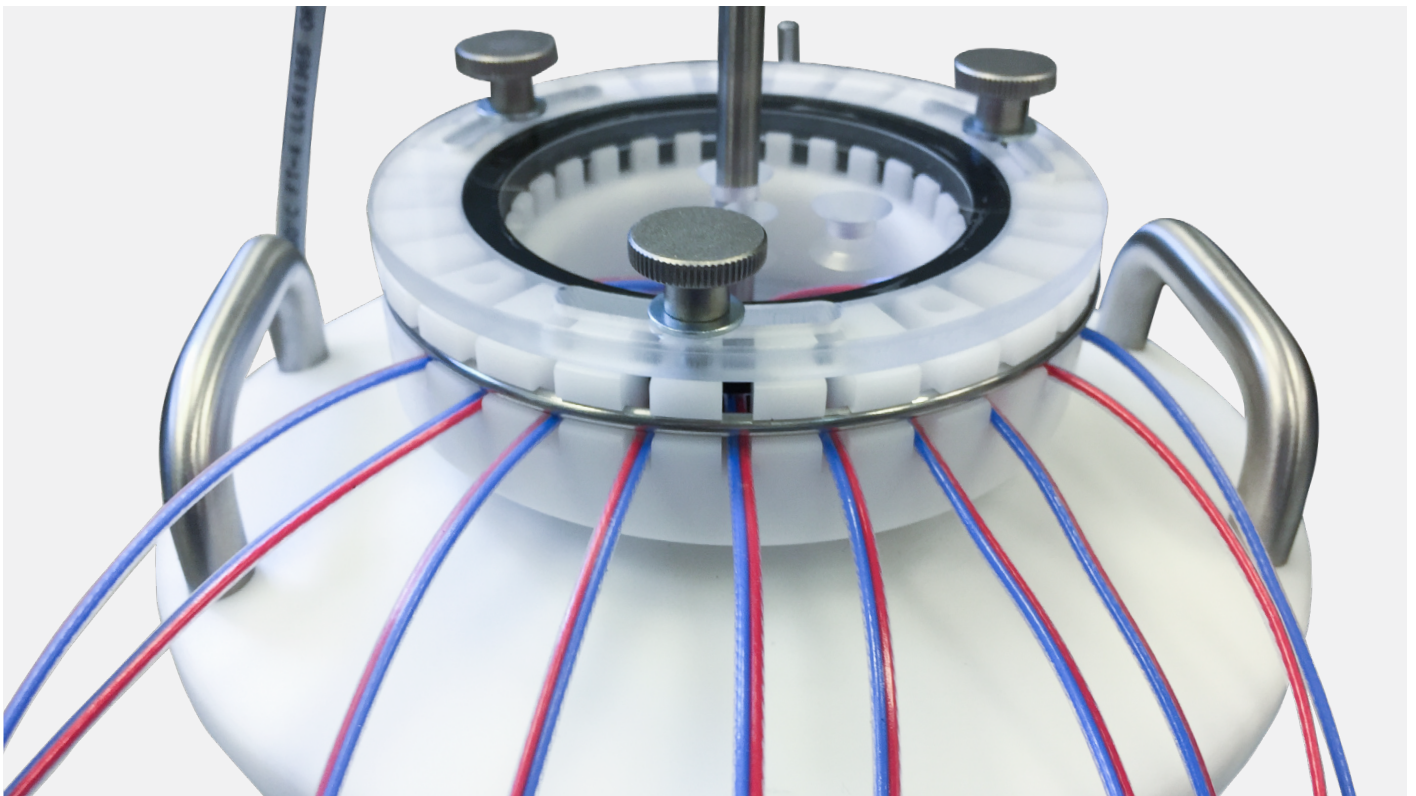

The Kaye Liquid Nitrogen (LN2) Comparator is a device specifically designed to address the calibration needs for extreme cold temperatures. With the ability to calibrate up to 48 Sensors at a time it addresses capacity and flexibility needs for thermal calibration at cryogenic temperatures.


It makes the calibration process much more reliable and secure compared to other methods used in the industry. It is often used in combination with other Kaye baths like the LTR-90 so multiple calibration points and verification points can be performed at cold temperatures.

Using a Kaye IRTD and a Kaye Validator the process is semi-automated to make it easier for the user and a calibration or verification report can be automatically generated at the end of the process.

The LN2 Comparator provides the ability to run a comparison calibration at the temperature around -196 C. It can be used to calibrate thermocouples and other temperature probes against the Kaye IRTD. The comparator is designed to be easy to use. The simple design requires no electrical power for operation. It simply uses liquid nitrogen to run calibrations at -196 C, the boiling point of nitrogen.

FEATURES

- Stainless steel Dewar for safe operation and longevity
- Perfectly designed to support semi-automated thermocouple calibration in combination with Kaye Validators
- Thermocouple holder makes for easy management of up to 48 thermocouples
- Easy to use fill port allows for addition of liquid nitrogen as needed
- IRTD holds securely in the center of the calibration block
- Overall design of LN2 Comparator guarantees low evaporation rate and long-lasting stable calibration points for many hours
- Foam lid included to reduce LN2 evaporation between calibrations
- All components are delivered in a rugged case with wheels for easy transportation and safe storage

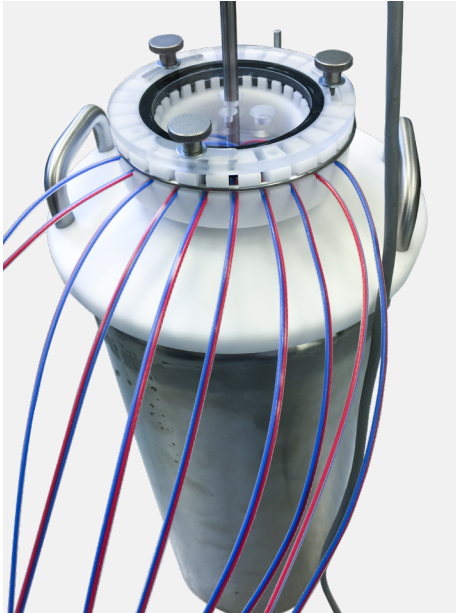

Kaye representative contact:

Request a demo:

EUROPE, MIDDLE EAST, AFRICA AND ASIA

Amphenol Advanced Sensors Germany GmbH
Sinsheimer Strasse 6
D-75179 Pforzheim
T: +49 (0) 7231-14 335 0
F: +49 (0) 7231-14335 29
Email: kaye@amphenol-sensors.com

USA/AMERICAS

Amphenol Thermometrics, Inc.
967 Windfall Road
St. Marys, PA 15857
T: +1(814) 834-9140
F: +1(814) 781-7969
Email: kaye-us@amphenol-sensors.com

INDIA

Amphenol Interconnect India Pvt Ltd.
Plot no. 6, Survey No.64 | Software Units layout
MAHAVEER TECHNO PARK
HITECH CITY, MADHAPUR | Hyderabad,
Telangana – 500081 | T: +91 40 33147100
Email: kaye-india@amphenol-sensors.com

CHINA

Amphenol (Changzhou) Connector
Systems Co., Ltd, Building 10,
Jintong Industrial Park, No. 8 Xihu Road,
Wujin High-Tech Development Zone,
Changzhou, Jiangsu 213164
T: 0086-519-83055197



Warranty and disclaimer: The information mentioned on documents are based on our current tests, knowledge and experience. Because of the effect of possible influences in an application of the product, they do not exempt the user from their own tests, checks and trials. A guarantee of certain properties or a guarantee for the proper suitability of the product for a specific, especially permanent application can not be derived from our data. Liability is therefore excluded to that extent permitted by law. Any proprietary rights of third parties as well as existing laws and regulations must be observed by the recipient of the product on his own responsibility.

© 2022 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.